


Gewinde-Schneidschrauben Linsenkopf-A-H

Thread cutting screws, cross recessed pan head
Vis auto-taraudeuses à tête bombée avec empreinte cruciforme

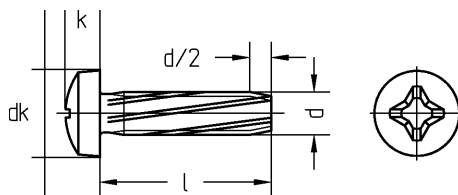

Übrige Maße nach DIN 7985

DIN 7516

d	M 3	M 4	M 5	M 6	M 8
dk	5,6	8	9,5	12	16
k	2,4	3,1	3,7	4,6	6
Kreuzschlitz Größe	1	2	2	3	4
Kernlochdurchmesser	2,7	3,6	4,5	5,5	7,4

WGR 6110

001 galv. verzinkt • zinc plated • galvanisé


d mm	l mm	Inhalt Stck	€ 100 Stck
M 3	6	2000	1,60
M 3	8	2000	1,84
M 3	10	2000	2,36
M 3	12	2000	4,72
M 3	16	2000	4,55
M 3	20	2000	5,10
M 4	6	2000	2,32
M 4	8	2000	2,44
M 4	10	1000	2,50
M 4	12	1000	2,60
M 4	16	1000	2,92
M 4	20	1000	4,44
M 4	25	1000	5,30
M 4	30	1000	7,28
M 4	35	1000	10,92
M 4	40	500	12,10
M 5	10	1000	3,96
M 5	12	1000	4,04
M 5	16	1000	4,96

d mm	l mm	Inhalt Stck	€ 100 Stck
M 5	18	1000	5,20
M 5	20	500	6,32
M 5	25	500	7,10
M 5	30	500	8,80
M 5	35	500	11,16
M 5	40	500	12,50
M 5	50	250	15,96
M 6	12	500	6,20
M 6	16	500	6,85
M 6	20	500	7,56
M 6	25	500	9,80
M 6	30	500	10,90
M 6	35	250	12,80
M 6	40	250	15,08
M 6	50	250	16,48
M 8	16	250	19,76
M 8	20	250	20,70
M 8	25	250	21,36

Gewinde-Schneidschrauben Senkkopf-D-H

Thread cutting screws with cross recessed countersunk head

ST Vis auto-taraudeuses à tête traisée avec empreinte cruciforme

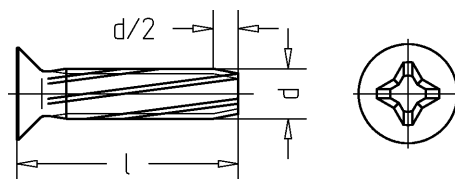

Übrige Maße nach DIN 965

DIN 7516

d	M 3	M 4	M 5	M 6	M 8
dk	5,5	8,4	9,3	11,3	15,8
k	1,65	2,7	2,7	3,3	4,65
Kreuzschlitz Größe	1	2	2	3	4
Kernlochdurchmesser	2,7	3,6	4,5	5,5	7,4

WGR 6111


001 galv. verzinkt • zinc plated • galvanisé

d	l	Inhalt	€	d	l	Inhalt	€
mm	mm	Stck	100 Stck	mm	mm	Stck	100 Stck
M 3	6	2000	5,24	M 5	35	500	8,52
M 3	8	2000	5,60	M 5	40	500	9,04
M 3	10	2000	6,24	M 5	50	500	15,48
M 3	12	2000	6,80	M 6	12	500	5,24
M 3	16	2000	7,10	M 6	16	500	6,32
M 4	8	1000	2,88	M 6	20	500	8,36
M 4	10	1000	2,90	M 6	25	500	8,68
M 4	12	1000	2,96	M 6	30	500	8,90
M 4	16	1000	3,10	M 6	35	250	9,85
M 4	20	1000	4,12	M 6	40	250	11,00
M 4	25	1000	9,72	M 6	45	250	13,84
M 4	30	500	12,80	M 6	50	250	15,60
M 4	35	1000	16,08	M 6	60	250	17,20
M 4	40	1000	18,24	M 8	16	250	9,72
M 5	10	1000	4,00	M 8	20	250	12,12
M 5	12	1000	4,70	M 8	25	250	15,84
M 5	16	1000	5,40	M 8	30	250	17,80
M 5	20	500	5,70	M 8	40	250	20,48
M 5	25	500	6,12	M 8	50	250	23,50
M 5	30	1000	7,40				

Gewinde-Schneidschrauben Linsen-senkopf-E-H

Thread cutting screws with cross recessed raised countersunk head

Vis auto-taraudeuses à tête fraisée bombée avec empreinte cruciforme

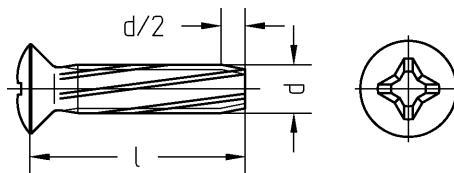

Übrige Maße nach DIN 966

DIN 7516

	M 3	M 4	M 5	M 6
d				
dk	5,5	8,4	9,3	11,3
f	0,7	1	1,2	1,4
k	1,65	2,7	2,7	3,3
Kreuzschlitz Größe	1	2	2	3
Kernlochdurchmesser	2,7	3,6	4,5	5,5

WGR 6112

001 galv. verzinkt • zinc plated • galvanisé

d	l	Inhalt	€
mm	mm	Stck	100 Stck
M 3	8	2000	7,60
M 3	10	1000	9,28
M 4	8	1000	4,48
M 4	10	1000	4,60
M 4	12	1000	4,90
M 4	16	1000	5,10
M 4	20	1000	5,30
M 4	25	1000	6,40
M 4	30	1000	7,28
M 5	12	1000	6,48
M 5	16	1000	7,30
M 5	20	500	9,48

d	l	Inhalt	€
mm	mm	Stck	100 Stck
M 5	25	500	9,90
M 5	30	500	10,26
M 5	35	500	11,30
M 5	40	500	12,40
M 6	16	500	6,68
M 6	20	500	9,04
M 6	25	500	9,24
M 6	30	500	12,60
M 6	35	250	13,76
M 6	40	250	14,60
M 6	45	250	16,56
M 6	50	200	18,20