


Senkschrauben mit Schlitz 4.6 mit Muttern

Countersunk head screws with forged slot
Vis à tête fraisée, avec fentes 4.6 avec écrous six-pans

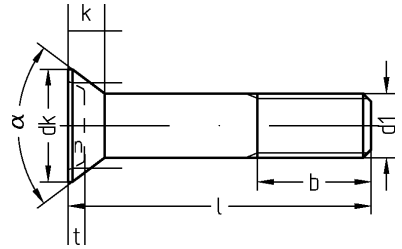

DIN 7969

d	M 12	M 16	M 24
b2	22	28	38
b3	28	35	50
dk	21	28	38
k	7	9	13
n	3	4	5
t	4	4	6
a	16	22	29

WGR 1692

061 feuerverzinkt (tzn) • hot-dip galvanized • zingué au feu (tzn)

d	l	Inhalt	€	d	l	Inhalt	€
mm	mm	Stck	100 Stck	mm	mm	Stck	100 Stck
M 12	35	100	319,68	M 16	55	50	755,25
M 12	40	100	370,00	M 24	80	25	1857,25
M 12	45	100	422,75	M 24	120	50	2175,50
M 12	50	100	432,73	M 24	130	50	2251,50
M 16	40	50	685,90	M 24	140	10	2313,25
M 16	45	50	698,25	M 24	150	50	2389,25
M 16	50	50	717,25	M 24	160	50	2479,50