


Sechskant-Blechschauben C

Hexagon head tapping screws

Vis à tôle à tête hexagonale

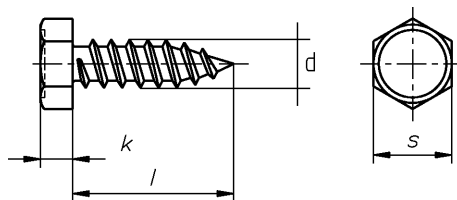

DIN 7976 DIN-ISO 1479

d	3,5	3,9	4,2	4,8	5,5	6,3	8,0
k	2,3	2,3	2,8	3	4	4,8	5,8
s	5,5	7	7	8	8	10	13

WGR 6030

001 galv. verzinkt • zinc plated • galvanisé

d	l	Inhalt	€	d	l	Inhalt	€
mm	mm	Stck	100 Stck	mm	mm	Stck	100 Stck
3,5	6,5	1000	0,68	5,5	13,0	1000	1,28
3,5	9,5	1000	0,38	5,5	16,0	1000	1,47
3,5	13,0	1000	0,49	5,5	19,0	1000	1,62
3,5	16,0	1000	0,57	5,5	22,0	1000	1,85
3,5	19,0	1000	0,64	5,5	25,0	1000	2,04
3,5	22,0	1000	0,72	5,5	32,0	500	2,57
3,5	25,0	1000	0,79	5,5	38,0	500	2,87
3,9	9,5	1000	0,68	5,5	45,0	500	3,29
3,9	13,0	1000	0,72	6,3	13,0	1000	2,23
3,9	16,0	1000	0,79	6,3	16,0	1000	2,42
3,9	19,0	1000	0,91	6,3	19,0	1000	2,64
3,9	22,0	1000	0,98	6,3	22,0	500	3,63
3,9	25,0	1000	1,10	6,3	25,0	500	3,76
4,2	9,5	1000	0,68	6,3	32,0	500	4,16
4,2	13,0	1000	0,76	6,3	38,0	500	4,23
4,2	16,0	1000	0,87	6,3	45,0	250	4,53
4,2	19,0	1000	0,98	6,3	50,0	250	5,21
4,2	22,0	1000	1,10	6,3	60,0	250	5,78
4,2	25,0	1000	1,17	6,3	70,0	250	9,80
4,2	32,0	1000	1,44	6,3	80,0	250	13,50
4,8	9,5	1000	2,34	8,0	16,0	250	5,74
4,8	13,0	1000	1,25	8,0	19,0	250	4,84
4,8	16,0	1000	1,28	8,0	22,0	250	5,67
4,8	19,0	1000	1,40	8,0	25,0	250	6,35
4,8	22,0	1000	1,51	8,0	32,0	250	7,94
4,8	25,0	1000	1,74	8,0	38,0	250	8,98
4,8	32,0	1000	1,96	8,0	45,0	250	9,86
4,8	38,0	500	2,23	8,0	50,0	250	11,14