


### Kegelstifte mit Gewindezapfen

Taper pins with thread and constant threaded part

Goupilles coniques à bout fileté

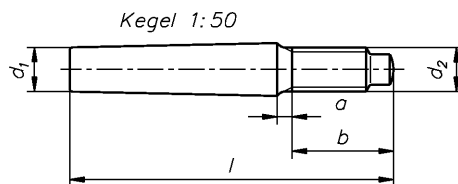

**DIN 7977** DIN-EN 28737

d1	5	6	8	10	12	14	16	20
b	14	18	22	24	27	30	35	35
a	2,4	3	4	4,5	5,3	6	6	6
d2	M5	M6	M8	M10	M12	M14	M16	M20

### WGR 1693 000

d	l	Inhalt	€
mm	mm	Stck	100 Stck
5,0	40	100	84,20
5,0	45	100	85,36
5,0	50	100	88,60
6,0	40	100	91,72
6,0	45	100	96,80
6,0	50	100	101,88
6,0	55	100	105,48
6,0	60	100	111,92
6,0	65	100	120,36
8,0	40	100	78,80
8,0	45	100	115,00
8,0	50	100	116,84
8,0	55	100	122,20
8,0	60	50	127,76
8,0	65	100	140,24
8,0	75	100	154,76
8,0	85	100	188,04
10,0	50	50	148,00
10,0	60	100	162,24

d	l	Inhalt	€
mm	mm	Stck	100 Stck
10,0	65	100	173,04
10,0	70	100	187,28
10,0	75	100	200,04
10,0	85	100	218,48
10,0	100	100	254,68
12,0	85	100	256,16
12,0	100	50	272,40
12,0	120	100	365,52
14,0	85	50	338,44
14,0	100	50	386,40
16,0	75	25	316,00
16,0	85	25	372,88
16,0	100	25	437,16
16,0	120	25	522,00
16,0	140	25	776,56
20,0	100	25	829,16
20,0	120	25	886,04
20,0	140	25	1032,76