


## Senkschrauben 4.8 mit Schlitz

Slotted countersunk (flat) head screws

Vis à tête fraisée 4.8 avec fente

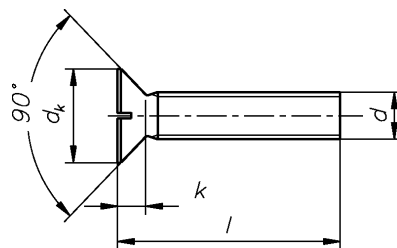

**DIN 963** DIN-EN-ISO 2009

d	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 16
dk	3,8	4,7	5,6	7,5	9,2	11	14,5	18	22	29
k	1,2	1,5	1,65	2,2	2,5	3	4	5	6	8

## WGR 0420

**001** galv. verzinkt • zinc plated • galvanisé


d	l	Inhalt	VE	€
mm	mm	Stck		100 Stck
M 2	4,0	2000	01	0,30
M 2	6,0	2000	01	0,34

d	l	Inhalt	VE	€
mm	mm	Stck		100 Stck
M 2	8,0	2000	01	0,38
M 2	10,0	2000	01	0,51

## Senkschrauben 4.8 mit Schlitz

Slotted countersunk (flat) head screws

Vis à tête fraisée 4.8 avec fente

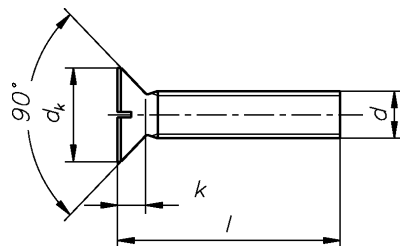

**DIN 963** DIN-EN-ISO 2009

### WGR 0420

**001** galv. verzinkt • zinc plated • galvanisé


d mm	l mm	Inhalt Stck	VE	€ 100 Stck
M 2	10,0	100	02	0,60
M 2	12,0	2000	01	0,80
M 2	12,0	100	02	2,03
M 2	16,0	2000	01	1,77
M 2,5	4,0	2000	01	0,34
M 2,5	6,0	2000	01	0,30
M 2,5	8,0	2000	01	0,38
M 2,5	10,0	2000	01	0,38
M 2,5	12,0	2000	01	0,42
M 2,5	16,0	2000	01	0,46
M 2,5	16,0	100	02	1,31
M 2,5	20,0	2000	01	0,59
M 3	4,0	2000	01	0,17
M 3	5,0	2000	01	0,21
M 3	6,0	2000	01	0,21
M 3	6,0	100	02	0,30
M 3	8,0	2000	01	0,30
M 3	8,0	100	02	0,34
M 3	10,0	2000	01	0,34
M 3	10,0	100	02	0,38
M 3	12,0	2000	01	0,42
M 3	12,0	100	02	0,46
M 3	14,0	2000	01	0,46
M 3	16,0	2000	01	0,51
M 3	16,0	100	02	0,68
M 3	18,0	2000	01	0,55
M 3	20,0	2000	01	0,59
M 3	20,0	100	02	0,76
M 3	22,0	2000	01	0,63
M 3	25,0	2000	01	0,68
M 3	25,0	100	02	0,84
M 3	30,0	2000	01	0,76
M 3	30,0	100	02	1,06
M 3	35,0	2000	01	0,84

d mm	l mm	Inhalt Stck	VE	€ 100 Stck
M 3	35,0	100	02	3,34
M 3	40,0	1000	01	0,97
M 3	40,0	100	02	3,79
M 3	45,0	1000	01	1,48
M 3	45,0	100	02	6,71
M 3	50,0	1000	01	1,70
M 3	50,0	100	02	8,00
M 3	55,0	1000	01	11,82
M 3	60,0	1000	01	12,79
M 4	5,0	2000	01	2,11
M 4	6,0	2000	01	0,51
M 4	6,0	100	02	0,65
M 4	8,0	2000	01	0,46
M 4	8,0	100	02	0,72
M 4	10,0	2000	01	0,51
M 4	10,0	100	02	0,70
M 4	12,0	2000	01	0,59
M 4	12,0	100	02	0,74
M 4	14,0	2000	01	0,63
M 4	16,0	2000	01	0,76
M 4	16,0	100	02	0,84
M 4	18,0	2000	01	0,84
M 4	20,0	1000	01	0,84
M 4	20,0	100	02	0,93
M 4	22,0	1000	01	0,93
M 4	25,0	1000	01	1,01
M 4	25,0	100	02	1,18
M 4	30,0	1000	01	1,22
M 4	30,0	100	02	1,30
M 4	35,0	1000	01	1,35
M 4	35,0	100	02	1,52
M 4	40,0	1000	01	1,56
M 4	40,0	100	02	1,65
M 4	45,0	1000	01	1,73

**Senkschrauben 4.8 mit Schlitz**

Slotted countersunk (flat) head screws

Vis à tête fraisée 4.8 avec fente

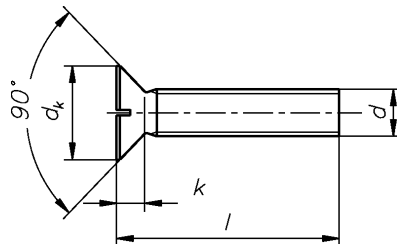

**DIN 963** DIN-EN-ISO 2009

**WGR 0420**

**001** galv. verzinkt • zinc plated • galvanisé


d mm	l mm	Inhalt Stck	VE	€ 100 Stck
M 4	45,0	100	02	1,84
M 4	50,0	1000	01	1,90
M 4	50,0	100	02	1,98
M 4	55,0	500	01	2,03
M 4	60,0	200	01	2,20
M 4	60,0	100	02	2,24
M 4	65,0	500	01	2,49
M 4	70,0	200	01	2,49
M 4	70,0	50	02	2,79
M 4	75,0	200	01	2,96
M 4	80,0	200	01	2,91
M 4	80,0	50	02	3,25
M 4	90,0	200	01	3,04
M 4	100,0	200	01	3,38
M 5	6,0	2000	01	0,46
M 5	8,0	2000	01	0,63
M 5	8,0	100	02	0,98
M 5	10,0	2000	01	0,89
M 5	10,0	100	02	1,04
M 5	12,0	1000	01	0,93
M 5	12,0	100	02	1,06
M 5	14,0	1000	01	0,97
M 5	16,0	1000	01	1,06
M 5	16,0	100	02	1,10
M 5	18,0	1000	01	1,18
M 5	20,0	1000	01	1,31
M 5	20,0	100	02	1,39
M 5	22,0	1000	01	1,44
M 5	25,0	1000	01	1,56
M 5	25,0	100	02	1,69
M 5	30,0	500	01	1,90
M 5	30,0	100	02	2,08
M 5	35,0	500	01	2,11
M 5	35,0	100	02	2,49

d mm	l mm	Inhalt Stck	VE	€ 100 Stck
M 5	40,0	500	01	2,41
M 5	40,0	100	02	2,54
M 5	45,0	500	01	2,66
M 5	45,0	100	02	2,85
M 5	50,0	500	01	2,91
M 5	50,0	100	02	3,08
M 5	55,0	200	01	2,96
M 5	55,0	50	02	4,22
M 5	60,0	200	01	3,00
M 5	60,0	50	02	4,24
M 5	65,0	200	01	16,09
M 5	70,0	200	01	3,67
M 5	70,0	50	02	4,26
M 5	75,0	200	01	24,49
M 5	80,0	200	01	4,14
M 5	80,0	50	02	4,86
M 5	90,0	100	01	8,49
M 5	90,0	50	02	10,50
M 5	100,0	100	01	4,73
M 5	100,0	25	02	6,00
M 6	8,0	1000	01	1,73
M 6	10,0	1000	01	1,14
M 6	10,0	100	02	1,27
M 6	12,0	1000	01	1,27
M 6	12,0	100	02	1,35
M 6	14,0	1000	01	1,48
M 6	16,0	1000	01	1,60
M 6	16,0	100	02	1,65
M 6	18,0	1000	01	1,82
M 6	20,0	1000	01	1,90
M 6	20,0	100	02	2,00
M 6	22,0	500	01	2,07
M 6	25,0	500	01	2,32
M 6	25,0	100	02	2,45

## Senkschrauben 4.8 mit Schlitz

Slotted countersunk (flat) head screws

Vis à tête fraisée 4.8 avec fente

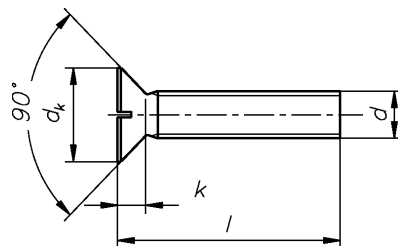

**DIN 963** DIN-EN-ISO 2009

### WGR 0420

**001** galv. verzinkt • zinc plated • galvanisé


d mm	l mm	Inhalt Stck	VE	€ 100 Stck
M 6	30,0	500	01	2,66
M 6	30,0	100	02	2,79
M 6	35,0	500	01	3,08
M 6	35,0	100	02	3,29
M 6	40,0	500	01	3,34
M 6	40,0	100	02	3,50
M 6	45,0	200	01	3,76
M 6	45,0	50	02	4,01
M 6	50,0	200	01	4,05
M 6	50,0	50	02	4,20
M 6	55,0	200	01	4,39
M 6	55,0	50	02	15,50
M 6	60,0	200	01	4,73
M 6	60,0	50	02	5,02
M 6	65,0	200	01	8,60
M 6	70,0	200	01	5,19
M 6	70,0	25	02	5,50
M 6	75,0	200	01	30,32
M 6	80,0	200	01	6,29
M 6	80,0	25	02	6,90
M 6	90,0	100	01	7,39
M 6	90,0	25	02	11,86
M 6	100,0	100	01	10,56
M 6	100,0	25	02	12,10
M 8	10,0	500	01	1,90
M 8	10,0	100	02	6,08
M 8	12,0	500	01	3,55
M 8	12,0	100	02	9,37
M 8	14,0	500	01	13,81
M 8	16,0	500	01	4,98
M 8	16,0	100	02	5,78
M 8	18,0	500	01	5,19
M 8	20,0	500	01	5,40
M 8	20,0	100	02	6,20

d mm	l mm	Inhalt Stck	VE	€ 100 Stck
M 8	22,0	100	01	5,66
M 8	25,0	500	01	6,00
M 8	25,0	50	02	6,70
M 8	30,0	200	01	6,97
M 8	30,0	50	02	7,30
M 8	35,0	200	01	7,77
M 8	35,0	50	02	8,20
M 8	40,0	200	01	8,74
M 8	40,0	50	02	9,10
M 8	45,0	100	01	9,33
M 8	45,0	50	02	9,50
M 8	50,0	100	01	10,18
M 8	50,0	50	02	10,70
M 8	55,0	100	01	11,02
M 8	55,0	25	02	13,10
M 8	60,0	100	01	12,67
M 8	60,0	25	02	14,00
M 8	65,0	100	01	10,56
M 8	70,0	100	01	15,88
M 8	70,0	25	02	16,50
M 8	75,0	100	01	52,14
M 8	80,0	100	01	12,54
M 8	80,0	25	02	18,30
M 8	90,0	100	01	12,24
M 8	90,0	25	02	20,10
M 8	100,0	100	01	15,54
M 8	100,0	25	02	21,50
M 10	16,0	100	01	5,45
M 10	20,0	100	01	5,07
M 10	25,0	100	01	6,38
M 10	30,0	100	01	7,70
M 10	35,0	100	01	8,66
M 10	40,0	100	01	8,90
M 10	45,0	100	01	14,14

## Senkschrauben 4.8 mit Schlitz

Slotted countersunk (flat) head screws

Vis à tête fraisée 4.8 avec fente

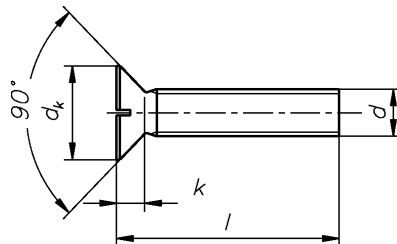

**DIN 963** DIN-EN-ISO 2009

## WGR 0420

**001** galv. verzinkt • zinc plated • galvanisé

d mm	l mm	Inhalt Stck	VE	€ 100 Stck
M 10	50,0	100	01	10,68
M 10	55,0	100	01	23,69
M 10	60,0	100	01	15,88
M 10	65,0	100	01	16,89
M 10	70,0	100	01	17,90
M 10	75,0	50	01	19,50
M 10	80,0	100	01	21,00
M 10	90,0	100	01	23,50
M 10	100,0	50	01	27,00
M 12	20,0	100	01	26,73
M 12	25,0	100	01	13,68
M 12	30,0	100	01	10,77
M 12	35,0	100	01	12,54
M 12	40,0	100	01	13,38
M 12	45,0	100	01	51,13
M 12	50,0	100	01	14,40
M 12	55,0	50	01	21,58

d mm	l mm	Inhalt Stck	VE	€ 100 Stck
M 12	60,0	100	01	25,42
M 12	70,0	50	01	26,20
M 12	80,0	50	01	143,56
M 12	90,0	50	01	157,91
M 12	100,0	50	01	200,56
M 16	25,0	100	01	254,98
M 16	30,0	50	01	254,98
M 16	35,0	50	01	203,26
M 16	40,0	50	01	215,00
M 16	45,0	50	01	260,00
M 16	50,0	50	01	302,14
M 16	55,0	50	01	320,00
M 16	60,0	50	01	335,00
M 16	70,0	50	01	345,00
M 16	80,0	50	01	413,95
M 16	90,0	50	01	425,00
M 16	100,0	50	01	436,37

## WGR 0420

**332** mit Kopflochbohrung galv. verzinkt • centre drilled and zinc plated • avec forage de tête galvanisé

d mm	l mm	Inhalt Stck	VE	€ 100 Stck
M 6	20,0	1000	01	8,99
M 6	25,0	500	01	10,40
M 6	30,0	500	01	10,56
M 6	35,0	500	01	10,98
M 6	40,0	500	01	11,53
M 6	45,0	200	01	13,98
M 6	50,0	200	01	16,00
M 6	60,0	200	01	17,40
M 6	70,0	200	01	19,50

d mm	l mm	Inhalt Stck	VE	€ 100 Stck
M 6	80,0	200	01	28,20
M 8	25,0	500	01	12,33
M 8	30,0	200	01	18,92
M 8	35,0	200	01	19,72
M 8	40,0	200	01	21,62
M 8	45,0	200	01	22,72
M 8	50,0	100	01	26,43
M 8	55,0	200	01	29,00
M 8	60,0	200	01	32,00