


Scheiben Vierkant für U-Träger

Square taper washers for U-sections

Plaquettes obliques (carrées) pour profils en U. inclinaison 8%

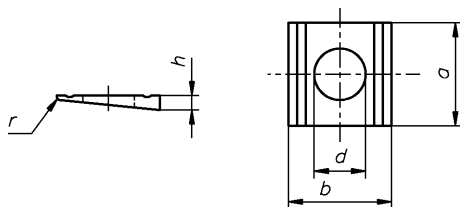

DIN 434

d	9	11	13,5	17,5	22	24	26	30
a	22	22	26	32	40	44	56	56
b	22	22	30	36	44	50	56	56
h	3,2	3,2	3,9	4,9	6	7	7,3	7,3
r	1,6	1,6	2	2,4	2,8	3,2	3,2	3,2
für Schrauben	M8	M10	M12	M16	M20	M22	M24	M27

WGR 1539 000

d mm	Inhalt Stck	€ 100 Stck	d mm	Inhalt Stck	€ 100 Stck
9,0	100	17,00	22,0	50	52,25
11,0	100	18,00	24,0	50	106,90
13,5	100	19,80	26,0	50	126,00
17,5	100	29,25	30,0	50	210,00

WGR 1539

001 galv. verzinkt • zinc plated • galvanisé

d mm	Inhalt Stck	€ 100 Stck	d mm	Inhalt Stck	€ 100 Stck
9,0	100	17,50	17,5	100	30,60
11,0	100	18,50	22,0	50	54,90
13,5	100	20,70			

WGR 1539

061 feuerverzinkt (tzn) • hot-dip galvanized • zingué au feu (tzn)

d mm	Inhalt Stck	€ 100 Stck	d mm	Inhalt Stck	€ 100 Stck
9,0	100	19,50	22,0	50	59,85
11,0	100	20,50	24,0	50	127,30
13,5	100	24,30	26,0	50	169,16
17,5	100	34,43	30,0	50	253,00