


Gewinde-Schneidschrauben mit Sechskantkopf, Form A

Thread cutting screws hexagon head
 Vis auto-taraudeuses à tête hexagonale fendue

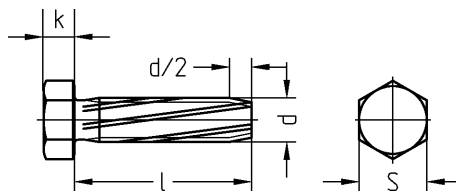

Übrige Maße nach EN 24 017 (DIN 933)

DIN 7513

WGR 6100


001 galv. verzinkt • zinc plated • galvanisé

d mm	l mm	Inhalt Stck	€ 100 Stck
M 5	10	1000	6,20
M 5	12	1000	6,40
M 5	16	1000	7,30
M 5	20	1000	9,20
M 5	25	1000	14,56
M 6	12	500	9,44
M 6	16	500	8,52
M 6	20	500	8,70
M 6	25	500	9,28
M 6	30	500	10,80

d mm	l mm	Inhalt Stck	€ 100 Stck
M 6	35	250	16,08
M 6	40	250	20,80
M 6	50	250	22,30
M 8	16	250	13,36
M 8	20	250	14,84
M 8	25	250	16,40
M 8	30	250	20,84
M 8	35	250	21,80
M 8	40	200	22,96
M 8	50	100	25,52

Gewinde-Schneidschrauben Zylinderkopf, Form B

Thread cutting screws cheese head
Vis auto-taraudeuses à tête cylindrique fendue

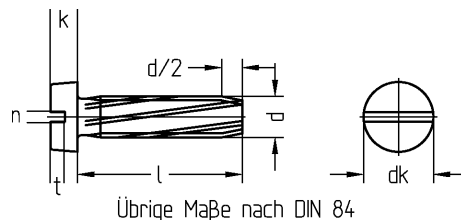

DIN 7513

d	M 3	M 4	M 5	M 6
Gewinde-Kernloch	2,7	3,6	4,5	5,5
dk	5,5	7	8,5	10
k	2	2,6	3,3	3,9
n	0,8	1,2	1,2	1,6
t	0,85	1,1	1,3	1,6

WGR 6101


001 galv. verzinkt • zinc plated • galvanisé

d	l	Inhalt	€
mm	mm	Stck	100 Stck
M 3	6	2000	4,04
M 3	8	2000	3,48
M 3	10	2000	3,36
M 3	12	2000	3,68
M 3	16	2000	4,52
M 4	6	1000	4,52
M 4	8	1000	4,00
M 4	10	1000	4,44
M 4	12	1000	4,56
M 4	16	1000	4,90

d	l	Inhalt	€
mm	mm	Stck	100 Stck
M 4	20	1000	10,24
M 4	25	1000	11,00
M 5	10	500	5,60
M 5	12	1000	5,88
M 5	16	1000	6,32
M 5	20	500	12,24
M 6	12	500	7,44
M 6	16	500	8,92
M 6	20	500	10,24
M 6	25	500	18,00

**Gewinde-Schneidschrauben Senkkopf,
Form F**

Thread cutting screws, slotted flat head
Vis auto-taraudeuses à tête fraisée fendue

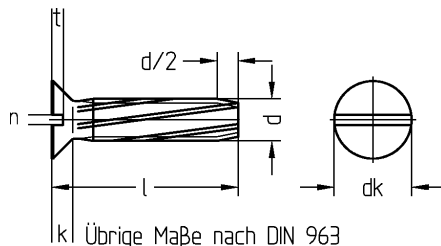

DIN 7513

d	M 3	M 4	M 5	M 6
Gewinde-Kernloch	2,7	3,6	4,5	5,5
dk	5,5	8,4	9,3	11,3
k	1,65	2,7	2,7	3,3
n	0,8	1,2	1,2	1,6
t	0,85	1,3	1,4	1,6

WGR 6102

001 galv. verzinkt • zinc plated • galvanisé

d	l	Inhalt	€
mm	mm	Stck	100 Stck
M 3	6	2000	5,16
M 3	8	2000	3,92
M 3	10	2000	4,70
M 3	12	2000	4,84
M 3	16	2000	5,60
M 4	8	1000	4,08
M 4	10	1000	5,80
M 4	12	1000	5,92
M 4	16	1000	5,88
M 4	20	1000	4,96
M 4	25	1000	6,10

d	l	Inhalt	€
mm	mm	Stck	100 Stck
M 4	30	1000	6,20
M 5	16	1000	7,40
M 5	20	500	8,16
M 6	16	500	8,48
M 6	20	500	12,40
M 6	25	500	20,80
M 6	30	500	25,24
M 6	35	250	27,16
M 6	40	250	33,04
M 6	45	250	35,00
M 6	50	250	37,10